



SAXON RLP

DESCRIPTION

SAXON ROAD LINE PAINT is a solvent-based, flexible, hard wearing road lining & sports marking paint with excellent intercoat adhesion properties. It may be applied to concrete and asphalt surfaces and has good chemical resistance, making it suitable where salt and chemicals used to control ice and snow are used, Saxon RLP is based on a chlorinated rubber system.

COLOUR AND PRODUCT PRESENTATION

Colour range See Saxon Colour Chart
Size 5 litre - 20 litre drum (larger size available on request)

MAIN PROPERTIES

PREPARED MIX PRODUCT	
Application	Roller or brush
Touch Dry	15 - 20 minutes
Recoatable	4 - 6 hours, drying time will be significantly longer in cold, damp conditions.
Coverage	5 - 6 m ² /litre Equivalent to 500 - 600 lineal meters of 50mm wide line.
Thinning	This product should not be thinned
Cleaning	Clean equipment immediately after use with chlorinated rubber thinners
Colours	White, Yellow, Blue, Green, Red Oxide (other colours on request)
Shelf Life	18 months: if stored correctly to manufacturer's guidelines.

PREPARATION

All areas must be clean, dry and free from oil, grease, anti-freeze, loose sand or any contamination. Do not use at temperatures below 10°C. New asphalt and concrete should be allowed to cure for 30 days (minimum) before the application of paint. Any curing compounds used on new concrete must be mechanically abraded off prior to striping.

COATING SYSTEM

APPLICATION

Stir well before and during use.

When striping on freshly sealed surfaces use caution, as some sealers can affect the curing and adhesion of traffic paint. Scatter the light reflective beads provided over the wet line to provide a light reflective finish. Once the product is dry, sweep the line to remove any loose beads. Do not reuse contaminated beads.





ROLLER



Apply using a roller, using it directly from the drum ensuring the entire sleeve is covered. Work in a methodical, systematic manner maintaining a manageable wet edge blending the material to achieve the desired pattern whilst still wet. Maintaining a continuous wet edge (approximately 1 m²)

BRUSH



Before use, flick the bristles back and forth to remove dust. Make sure you remove excess liquid before painting. Fill the brush by dipping in up to half the length of the bristles. Tap it gently against the side of the can: don't wipe the brush hard against the lip. The bristles should flex only slightly as you brush – don't over press – let the paint flow from the brush.

CLEANING

Return excess material/paint to container. Wash with clean water immediately after use.

HEALTH AND SAFETY RECOMMENDATIONS

Please refer to the Safety, Health and Environmental Information on the container. When preparing the surfaces avoid the inhalation of dust and/or metal particles. Wear a suitable facemask and recommended safety personal protection. Material Safety Data Sheets for this is available freely available at Saxon Coatings website.

STORAGE

Store in secure dry conditions. Keep out of reach of children. Containers should be kept closed during storage. Do not empty into drains, water rivers or access routes to septic drums.






GENERAL INFORMATION

Apply all products in accordance with BS 6150: 2006 Code of practice for painting of buildings and BS 8000: Part 12: 1989 Code of practice for decorative wallcoverings and painting.

Every care is taken to ensure that all information provided on this Technical Data Sheet is accurate. Final results cannot be guaranteed by the manufacturer as it has no control over the conditions under which its products are applied.

For help or more information contact Saxon Coatings or visit our website at www.saxoncoatings.com Before using this product please ensure you have the latest information. The information is correct at date of issue February 2022.

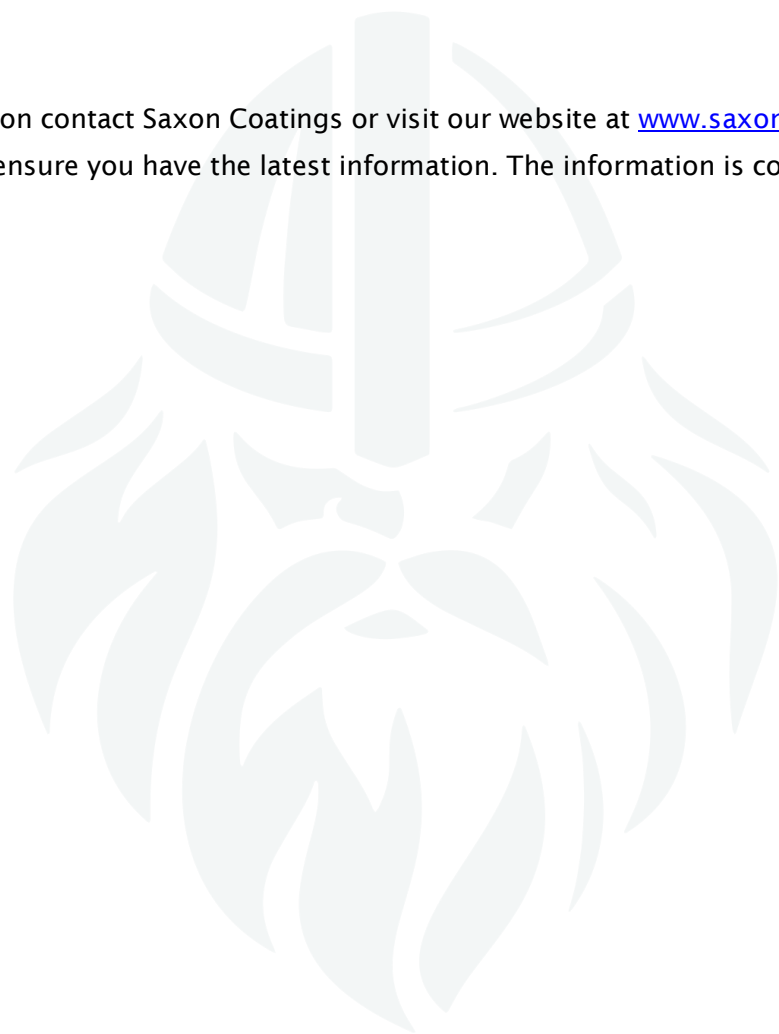

WARRANTY

SAXON COATINGS warrant its title to the product, that the quality of the product conforms to Saxon Coatings' specifications for such product in effect at the time of manufacture and that the product shall be delivered free of the rightful claim of any third person for infringement of any patent covering the product. This product is for professional use only. The applicators and operators shall be trained, experienced and have the capability and equipment to mix/stir and apply the coatings correctly and according to Saxon Coatings' technical documentation. Applicators and operators shall use appropriate personal protection equipment when using this product. This guideline is given based on the current knowledge of the product. These are the only warranties that Saxon Coatings makes and all other express or implied warranties, under statute or arising otherwise in law, from a course of dealing or usage of trade, including without limitation, any other warranty of fitness for a particular purpose or use, are disclaimed by Saxon Coatings. Any claim under this warranty must be made by Buyer to Saxon Coatings in writing within five (5) days of Buyer's discovery of the claimed defect, but in no event later than the expiration of the applicable shelf life of the product, or one year from the date of the delivery of the product to the Buyer, whichever is earlier. Buyer's failure to notify Saxon Coatings of such non-conformance as required herein shall bar Buyer from recovery under this warranty Any suggested deviation to suit the site conditions shall be forwarded to the responsible Saxon Coatings' representative for approval before commencing the work.

LIMITATIONS OF LIABILITY

The information in this document is given to the best of Saxon Coatings' knowledge. The information in this sheet is intended for guidance only and is based upon laboratory tests that Saxon Coatings' believes to be reliable. Saxon Coatings' products are considered as semi-finished goods and as such, products are often used under conditions beyond Saxon Coatings' control like the quality or condition of the substrate, or the many factors affecting the use and application of the product. The product and related information are designed for users having the requisite knowledge and industrial skills in the industry and it is the end-user's responsibility to determine the suitability of the product for its own particular use and it shall be deemed that Buyer has done so, as its sole discretion and risk. Saxon Coatings' does not accept any liability arising from any loss, injury or damage resulting from such use or the contents of this information. Variations in the application environment, changes in procedures of use,





SAXON COATINGS

or extrapolation of data may cause unsatisfactory results. Minor product variations may be implemented in order to comply with local requirements. Users should always consult Saxon Coatings' for specific guidance on the general suitability of this product for their needs and specific application practices. If there is any inconsistency between different language issues of this document, the English (United Kingdom) version will prevail

