



## Saxon SF Premium Primer

### DESCRIPTION

Saxon SF Premium Primer is a clear, ready to use water based treatment for bonding and priming surfaces prior to painting.

### USES

Saxon SF Premium Primer is recommended for use as a pre-treatment for surfaces which are old, perished, chalky or porous. It can be used on concrete, plaster, plasterboard, cement renders, pebbledash etc.

### ADVANTAGES

- **SAFE & EASY TO USE** - Ready to use polymer emulsion, can be applied by brush, roller or spray.
- **VERSATILE** - May be used on many different substrates.

**Packaging:** Saxon SF Premium Primer is available in 5 litre packs.

**Coverage:** Typically 6m<sup>2</sup> per litre, depending on substrate porosity and texture.

### METHOD OF USE

**Surface Preparation:** Any algae or mould must first be removed by mechanical means and/or with a fungicidal wash. Surfaces must also be cleaned to remove any loose, friable or flaking material.

Do not apply Saxon SF Premium Primer when the temperature is below 5°C or when rain or frost is imminent. The product can be applied to damp substrates.

### APPLICATION

The product should not be diluted, simply stir well. Apply by brush, airless spray or roller direct from the container. A second application may be necessary with surfaces which are particularly porous or powdery. Allow surface to dry for up to 12 hours between coats or before decorating.






**Cleaning of Tools:** Clean equipment with soap and water after use.

## STORAGE

Saxon SF Premium Primer must be kept in cool, dry conditions away from frost and direct sunlight. This product will have a shelf life of 12 months if stored in these conditions in original unopened containers.

## HEALTH & SAFETY

Saxon SF Premium Primer is not classified as hazardous. Please refer to the Health & Safety Data Sheet for detailed information on the handling of this product.

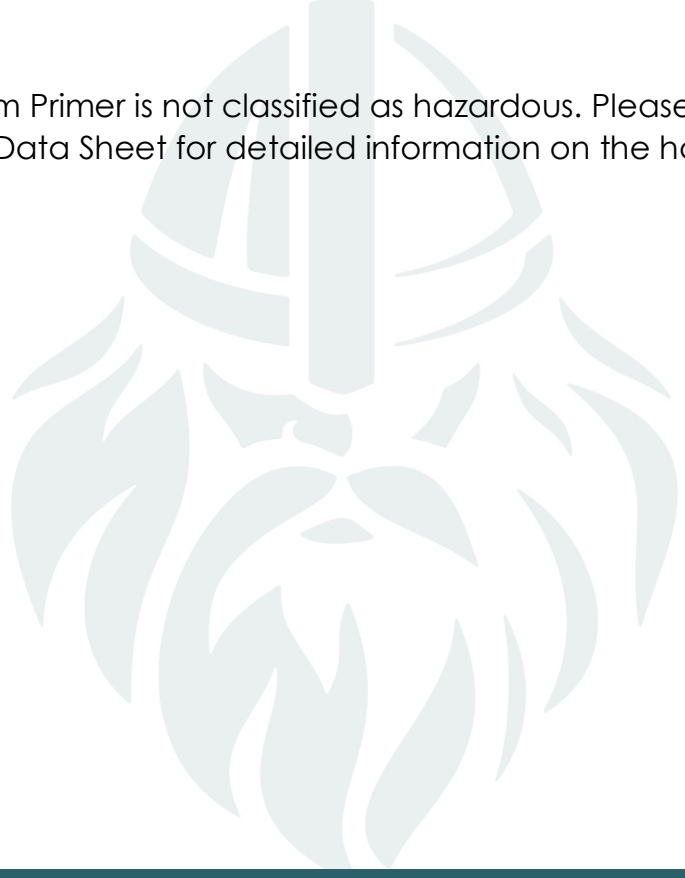

## WARRANTY

SAXON COATINGS warrant its title to the product, that the quality of the product conforms to Saxon Coatings' specifications for such product in effect at the time of manufacture and that the product shall be delivered free of the rightful claim of any third person for infringement of any patent covering the product. This product is for professional use only. The applicators and operators shall be trained, experienced and have the capability and equipment to mix/stir and apply the coatings correctly and according to Saxon Coatings' technical documentation. Applicators and operators shall use appropriate personal protection equipment when using this product. This guideline is given based on the current knowledge of the product. These are the only warranties that Saxon Coatings makes and all other express or implied warranties, under statute or arising otherwise in law, from a course of dealing or usage of trade, including without limitation, any other warranty of fitness for a particular purpose or use, are disclaimed by Saxon Coatings. Any claim under this warranty must be made by Buyer to Saxon Coatings in writing within five (5) days of Buyer's discovery of the claimed defect, but in no event later than the expiration of the applicable shelf life of the product, or one year from the date of the delivery of the product to the Buyer, whichever is earlier. Buyer's failure to notify Saxon Coatings of such non-conformance as required herein shall bar Buyer from recovery under this warranty. Any suggested deviation to suit the site conditions shall be forwarded to the responsible Saxon Coatings' representative for approval before commencing the work.

## LIMITATIONS OF LIABILITY

The information in this document is given to the best of Saxon Coatings' knowledge. The information in this sheet is intended for guidance only and is based upon laboratory tests that Saxon Coatings' believes to be reliable. Saxon Coatings' products are considered as semi-finished goods and as such, products are often used under conditions beyond Saxon Coatings' control like the quality or condition of the substrate, or the many factors affecting the use and application of the product. The product and related information are designed for users having the requisite knowledge and industrial skills in the industry and it is the end-user's responsibility to determine the suitability of the product for its own particular use and it shall be deemed that Buyer has done so, as its sole discretion and risk. Saxon Coatings' does not accept any liability arising from any loss, injury or damage resulting from such use or the contents of this information. Variations in the application environment, changes in procedures of use, or extrapolation of data may cause unsatisfactory results. Minor product variations may be implemented in order to comply with local requirements. Users should always consult Saxon Coatings' for specific guidance on the general suitability of this product for their needs and specific application practices. If there is any inconsistency between different language issues of this document, the English (United Kingdom) version will prevail.

